



Elo & Kitchen Armor


All-In-One



Elo 10" | 15" | 22"

KA 15.6" | 21.5"

Elo I-Series Steel 15" AiO Touchscreen

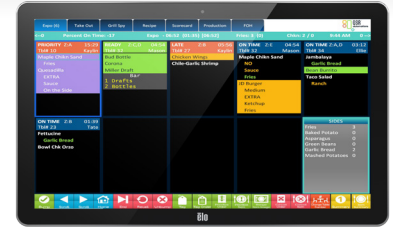

FEATURE	SPECIFICATION
Operating System	Android™ 12
Processor	Rockchip RK3399 Dual-core Cortex-A72 up to 1.8GHz + Quad-core Cortex-A53 up to 1.4GHz
Memory	4GB
Storage	32GB SSD
I/O Ports	Ethernet 1x LAN Gigabit, 1x USB 3.0 Support (900mA), 1x Type C USB output
Speakers	2x 1.5W
Wireless	802.11a/b/g/n/ac + Bluetooth 5.0
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 touch
Number of Colors	8-bit (16.7 million)
Brightness	TouchPro PCAP: 215 nits, LCD Panel: 250 nits
Response Time	25 ms
Contrast Ratio	700:1
Power	AC input voltage: 100-240 VAC; Input frequency: 50-60 Hz
Power Over Ethernet	MAX 25.5W (for PoE models)
Aspect Ratio	16:9
Dimensions (W x D x H)	15.08" x 9.11" x 1.22" / 383 mm x 231.5 mm x 30.9 mm
Weight	5 lbs / 2.27 kg
Temperature	32°F to 113°F / 0°C to 45°C
Mounting Options	VESA 75mm and 100mm
Peripheral Mounting	N/A
Warranty	2 years standard
Regulatory Approvals	UL/FCC (US); cUL/IC (Canada); CE WEEE/UKCA (Europe); CB (International); VCCI/MIC (Japan); RCM (Australia); CCC/RoHS/SRRC (China)

Elo I-Series Steel 22" AiO Touchscreen




FEATURE	SPECIFICATION
Operating System	Android™ 12
Processor	Rockchip RK3399 Dual-core Cortex-A72 up to 1.8GHz + Quad-core Cortex-A53 up to 1.4GHz
Memory	4GB
Storage	32GB SSD
I/O Ports	Ethernet 1x LAN Gigabit, 1x USB 3.0 Support (900mA), 1x Type C USB output
Speakers	2x 1.5W
Wireless	802.11a/b/g/n/ac + Bluetooth 5.0
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 touch
Number of Colors	8-bit (16.7 million)
Brightness	TouchPro PCAP: 215 nits, LCD Panel: 250 nits
Response Time	14 ms
Contrast Ratio	1000:1
Power	AC input voltage: 100-240 VAC; Input frequency: 50-60 Hz
Power Over Ethernet	MAX 25.5W (for PoE models)
Aspect Ratio	16:9
Dimensions (W x D x H)	20.98" x 12.75" x 1.75" / 533 mm x 324 mm x 44.4 mm
Weight	13.07 lbs / 5.93 kg
Temperature	32°F to 113°F / 0°C to 45°C
Mounting Options	VESA 75mm and 100mm
Peripheral Mounting	N/A
Warranty	2 years standard
Regulatory Approvals	UL/FCC (US); cUL/IC (Canada); CE WEEE/UKCA (Europe); CB (International); VCCI/MIC (Japan); RCM (Australia); CCC/RoHS/SRRC (China)

Elo 10" All-in-One




FEATURE	SPECIFICATION
Operating System	Android™ 10
Processor	Value Model: Rockchip RK3399
Memory	4GB
Storage	32GB SSD
I/O Ports	Ethernet 1x LAN Gigabit, 1x USB 3.0 support (900mA), Type C USB output, Micro SD slot, GPIO
Speakers	Two 2W stereo internal
Wireless	802.11 a/b/g/n/ac + Bluetooth 5.0
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Number of Colors	8-bit (16.7 million)
Brightness	TouchPro PCAP: 250 nits, LCD Panel: 300 nits
Response Time	25 ms
Contrast Ratio	800:1
Power	AC input voltage: 100-240 VAC; Input frequency: 50-60 Hz
Aspect Ratio	16:10
Dimensions (W x D x H)	9.96" x 6.65" x 0.87" (252.9mm x 169.0mm x 22.1mm)
Weight	4.9 lbs (2.2 kg)
Temperature	32°F to 104°F (0°C to 40°C)
Mounting Options	VESA 75mm
Peripheral Mounting	Not available
Warranty	2 year
Regulatory Approvals	UL/cUL (US); FCC (US); IC (Canada); CE (Europe); CB (International); VCCI, MIC (Japan); RCM (Australia)
Supported Countries	Canada, USA, Australia, Japan, New Zealand, Austria, Belgium, Czech Republic, Denmark, France, Germany, United Kingdom, Hungary, Italy, Netherlands, Poland, Portugal, Romania Spain, Sweden, Switzerland, Turkey, Brazil

Elo 15" All-in-One

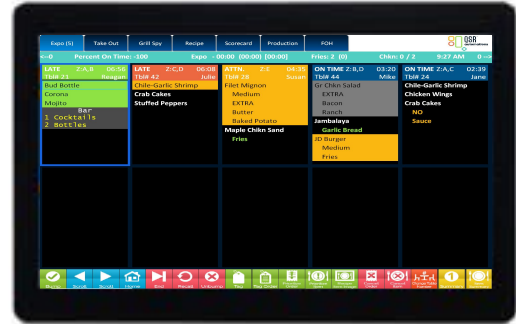


FEATURE	SPECIFICATION
Operating System	Android™ 10
Processor	Value Model: Rockchip RK3399
Memory	4GB
Storage	32GB SSD
I/O Ports	Ethernet 1x LAN Gigabit, 1x USB 3.0 support (900mA), Type C USB output, Micro SD slot, GPIO
Speakers	Two 2W stereo internal
Wireless	802.11 a/b/g/n/ac + Bluetooth 5.0
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Number of Colors	8-bit (16.7 million)
Brightness	TouchPro PCAP: 250 nits, LCD Panel: 300 nits
Response Time	25 ms
Contrast Ratio	800:1
Power	AC input voltage: 100-240 VAC; Input frequency: 50-60 Hz
Aspect Ratio	16:10
Dimensions (W x D x H)	15.23" x 9.77" x 1.11" (386.74mm x 248.17mm x 28.3mm)
Weight	Unpackaged: 3.5 lbs (1.59 kg) Packaged: 7.20 lbs (3.27 kg)
Temperature	32°F to 104°F (0°C to 40°C)
Mounting Options	VESA 75mm
Peripheral Mounting	Not available
Warranty	2 year
Regulatory Approvals	UL/cUL (US); FCC (US); IC (Canada); CE (Europe); CB (International); VCCI, MIC (Japan); RCM (Australia)
Supported Countries	Canada, USA, Australia, Japan, New Zealand, Austria, Belgium, Czech Republic, Denmark, France, Germany, United Kingdom, Hungary, Italy, Netherlands, Poland, Portugal, Romania Spain, Sweden, Switzerland, Turkey, Brazil

Elo 22" All-in-One

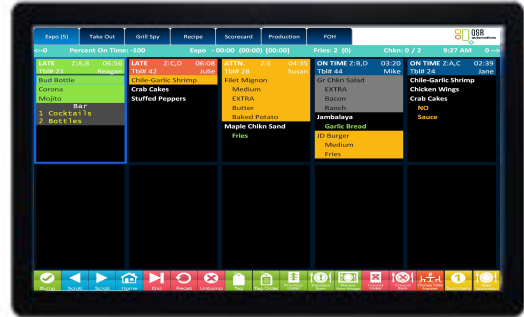


FEATURE	SPECIFICATION
Operating System	Android™ 10
Processor	Value Model: Rockchip OK3399
Memory	4GB
Storage	32GB SSD
Speakers	Two 2W stereo internal
I/O Ports	Ethernet 1x LAN Gigabit, 1x USB 3.0 Support (900mA), Type C USB output, Micro SD slot, GPIO
Wireless	802.11 a/b/g/n/ac + Bluetooth 5.0
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Number of Colors	8-bit (16.7 million)
Brightness	TouchPro PCAP: 215 nits, LCD Panel: 300 nits
Response Time	5 ms
Contrast Ratio	1000:1
Power	AC input voltage: 100-240 VAC; Input frequency: 50-60 Hz
Aspect Ratio	16:10
Dimensions (W x D x H)	20.66" x 12.79" x 1.17" (524.8mm x 324.8mm x 29.7mm)
Weight	9.5 lbs (4.3 kg)
Temperature	32°F to 104°F (0°C to 40°C)
Mounting Options	VESA 75mm
Peripheral Mounting	Not available
Warranty	2 year
Regulatory Approvals	UL/cUL (US); FCC (US); IC (Canada); CE (Europe); CB (International); VCCI, MIC (Japan); RCM (Australia)
Supported Countries	Canada, USA, Australia, Japan, New Zealand, Austria, Belgium, Czech Republic, Denmark, France, Germany, United Kingdom, Hungary, Italy, Netherlands, Poland, Portugal, Romania Spain, Sweden, Switzerland, Turkey, Brazil

Elo 15" Windows All-in-One

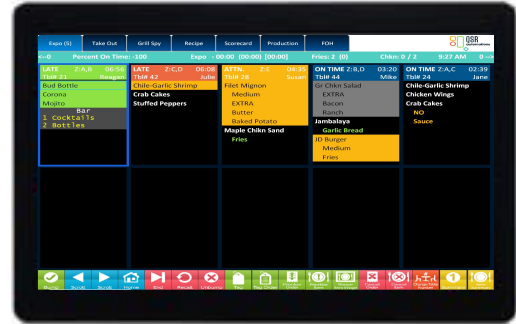

FEATURE	SPECIFICATION
Operating System	Windows 10 IoT
Processor	Intel® Celeron® J4125 Processor (4M Cache, up to 2.7 GHz)
Memory	Celeron: 4GB 2666MHz DDR4 SO-DIMM on 1 of 2 slots (Expandable to 8GB maximum on 2 slots)
Storage	128GB M.2 SATA SSD 72 TBW
I/O Ports	1 x LAN RJ45 (Gigabit), 1 x USB 3.0, 4 x Micro USB 2.0 on edges for optional Elo Edge Connect peripherals
Speakers	2 x 2W internal speakers
Wireless	Wi-Fi 802.11 a/b/g/n/ac 2.4GHz and 5GHz
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Brightness	LCD panel: 300 nits; TouchPro PCAP: 270 nits
Response Time	25 msec
Contrast Ratio	700:1
Power	External USB-C power supply brick, AC input voltage: 100-240 VAC, Input frequency: 50-60 Hz
Aspect Ratio	16:9
Dimensions (W x D x H)	15.13" x 9.7" x 1.72"
Weight	Packaged: 9.5 lbs / 4.3 kg Unpackaged: 4.9 lbs / 2.2 kg
Temperature	Operating: 0°C to 35°C / 32°F to 95°F; Storage: -20°C to 60°C / -4°F to 140°F
Mounting Options	75mm VESA mount
Warranty	3 year
Regulatory Approvals	UL/cUL, FCC, TUV, CE, CB, UKCA, Mexico NOM, C-Tick/RCM, VCCI, Argentina S-Mark, CCC

Elo 22" Windows All-in-One

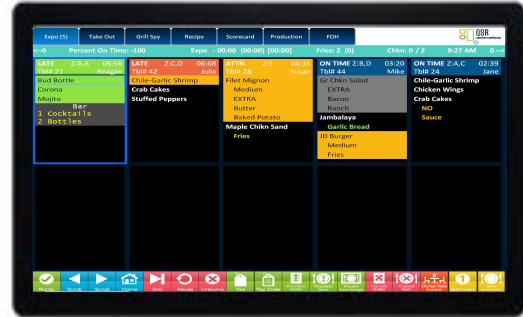


FEATURE	SPECIFICATION
Operating System	Windows 10 IoT
Processor	Intel® Celeron® J4125 Processor (4M Cache, up to 2.7 GHz)
Memory	Celeron: 4GB 2666MHz DDR4 SO-DIMM on 1 of 2 slots (Expandable to 8GB maximum on 2 slots)
Storage	128GB M.2 SATA SSD 72 TBW
Speakers	2 x 2W internal speakers
I/O Ports	1 x LAN RJ45 (Gigabit), 1 x USB 3.0, 4 x Micro USB 2.0 on edges for optional Elo Edge Connect peripherals
Wireless	Wi-Fi 802.11 a/b/g/n/ac 2.4GHz and 5GHz
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Brightness	LCD panel: 250 nits; TouchPro PCAP: 225 nits
Response Time	14 msec
Contrast Ratio	1000:1
Power	External USB-C power supply brick, AC input voltage: 100-240 VAC, Input frequency: 50-60 Hz
Aspect Ratio	16:9
Dimensions (W x D x H)	20.7" x 12.57" x 2.07"
Weight	Packaged: 15.4 lbs / 7 kg Unpackaged: 11.5 lbs / 5.2 kg
Temperature	Operating: 0°C to 35°C / 32°F to 95°F; Storage: -20°C to 60°C / -4°F to 140°F
Mounting Options	75mm or 100mm VESA mount
Warranty	3 year
Regulatory Approvals	UL/cUL, FCC, TUV, CE, CB, UKCA, Mexico NOM, C-Tick/RCM, VCCI, Argentina S-Mark, CCC

Kitchen Armor 15.6" All-in-One



FEATURE	SPECIFICATION
Material	Stainless Steel, 2.0mm strengthen glass
Active Display Area	13.55" x 7.62" / 344.16 mm x 193.59 mm
Diagonal	15.6"
Aspect Ratio	16:9
Dimensions	15.44" x 9.63" x 1.63" / 392.18 mm x 244.60 mm x 41.40 mm
Weight	8.45 lbs / 3.83 kgs
Native Resolution	1920 x 1080 at 60Hz
Color Depth	262 K
Touch	Technology: PCAP Resolution: 4096 x 4096 # of Touches: 10-Touch Accuracy: 2mm Touch Response Time: 10msec
Input Method	Finger, Touch Pen, Gloved Hand
CPU	Rk3288
Memory	2G
Storage	8G
Operating System	Android 10
Networking	10/100 Ethernet LAN
Brightness (typical)	215 nits
Response (typical)	30 msec
Viewing Angle	Horizontal: 85 or 170 total; Vertical: 85 or 170 total
Contrast Ratio	800:1
Light Transmission	86%
Power Supply	POE+ / External 12V DC Power Adapter
Temperature	Operating: 0C to 40C (32F to 104F); Storage: -20C to 60C (-4F to 140F)
Humidity	Operating: 20% to 80%; Storage: 10% to 90%
Mounting Options	100 mm VESA mount
IP	IP 65
Certifications	CE, FCC
Warranty	3 year

Kitchen Armor 21.5" All-in-One

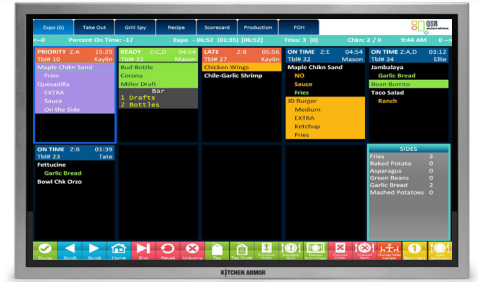

FEATURE	SPECIFICATION
Material	Stainless Steel, 2.0mm strengthen glass
Active Display Area	18.77" x 10.56" / 476.64mm x 268.11 mm
Diagonal	21.5"
Aspect Ratio	16:9
Dimensions	20.83" x 12.6" x 1.94" / 529mm x 320mm x 49.2mm
Weight	16.3 lbs / 7.39 kgs
Native Resolution	1920 x 1080 at 60Hz
Color Depth	16.7 million
Touch	Technology: PCAP Resolution: 4096 x 4096 # of Touches: 10-Touch Accuracy: 4mm Touch Response Time: 10msec
Input Method	Finger, Touch Pen, Gloved Hand
CPU	RK3588
Memory	8G
Storage	64G
Operating System	Android 12
Networking	Ethernet LAN 1xRJ45 (1000/100/10 Mbps)
Brightness (typical)	250 nits
Response (typical)	18 msec
Viewing Angle	Horizontal: 89 or 178 total; Vertical: 89 or 178 total
Contrast Ratio	3000:1
Light Transmission	86%
Power Supply	POE+ / External 12V DC Power Adapter
Temperature	Operating: 0C to 40C (32F to 104F); Storage: -20C to 60C (-4F to 140F)
Humidity	Operating: 20% to 80%; Storage: 10% to 90%
Mounting Options	100 mm VESA mount
IP	IP 65 Front Side, IP 65 Industrial RJ45 Jack Available (POE only)
Certifications	CE, FCC, ROHS
I/O Ports	Barrel Plug x 1, 3.5mm AUX x 1, HDMI x 1, RJ45 x 1, USB 2.0 x 2 (Type A), USB 3.0 x 1 (Type A), USB 2.0 x 1 (Type C)
Warranty	3 year