



Elo

All-In-One




10" | 15" | 22"

Elo 10" All-in-One




FEATURE	SPECIFICATION
Operating System	Android™ 10
Processor	Value Model: Rockchip RK3399
Memory	4GB
Storage	32GB SSD
I/O Ports	Ethernet 1x LAN Gigabit, 1x USB 3.0 support (900mA), Type C USB output, Micro SD slot, GPIO
Speakers	Two 2W stereo internal
Wireless	802.11 a/b/g/n/ac + Bluetooth 5.0
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Number of Colors	8-bit (16.7 million)
Brightness	TouchPro PCAP: 250 nits, LCD Panel: 300 nits
Response Time	25 ms
Contrast Ratio	800:1
Power	AC input voltage: 100-240 VAC; Input frequency: 50-60 Hz
Aspect Ratio	16:10
Dimensions (W x D x H)	9.96" x 6.65" x 0.87" (252.9mm x 169.0mm x 22.1mm)
Weight	4.9 lbs (2.2 kg)
Temperature	32°F to 104°F (0°C to 40°C)
Mounting Options	VESA 75mm
Peripheral Mounting	Not available
Warranty	2-years
Regulatory Approvals	UL/cUL (US); FCC (US); IC (Canada); CE (Europe); CB (International); VCCI, MIC (Japan); RCM (Australia)
Supported Countries	Canada, USA, Australia, Japan, New Zealand, Austria, Belgium, Czech Republic, Denmark, France, Germany, United Kingdom, Hungary, Italy, Netherlands, Poland, Portugal, Romania Spain, Sweden, Switzerland, Turkey, Brazil

Elo 15" All-in-One

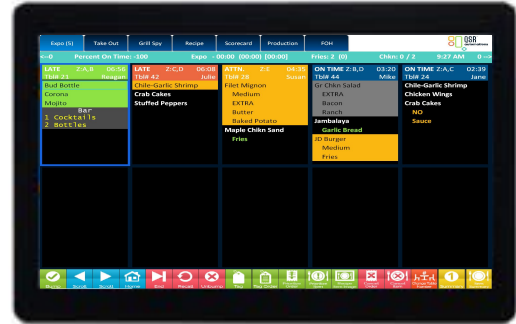


FEATURE	SPECIFICATION
Operating System	Android™ 10
Processor	Value Model: Rockchip RK3399
Memory	4GB
Storage	32GB SSD
I/O Ports	Ethernet 1x LAN Gigabit, 1x USB 3.0 support (900mA), Type C USB output, Micro SD slot, GPIO
Speakers	Two 2W stereo internal
Wireless	802.11 a/b/g/n/ac + Bluetooth 5.0
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Number of Colors	8-bit (16.7 million)
Brightness	TouchPro PCAP: 250 nits, LCD Panel: 300 nits
Response Time	25 ms
Contrast Ratio	800:1
Power	AC input voltage: 100-240 VAC; Input frequency: 50-60 Hz
Aspect Ratio	16:10
Dimensions (W x D x H)	15.23" x 9.77" x 1.11" (386.74mm x 248.17mm x 28.3mm)
Weight	Unpackaged: 3.5 lbs (1.59 kg) Packaged: 7.20 lbs (3.27 kg)
Temperature	32°F to 104°F (0°C to 40°C)
Mounting Options	VESA 75mm
Peripheral Mounting	Not available
Warranty	2-year
Regulatory Approvals	UL/cUL (US); FCC (US); IC (Canada); CE (Europe); CB (International); VCCI, MIC (Japan); RCM (Australia)
Supported Countries	Canada, USA, Australia, Japan, New Zealand, Austria, Belgium, Czech Republic, Denmark, France, Germany, United Kingdom, Hungary, Italy, Netherlands, Poland, Portugal, Romania Spain, Sweden, Switzerland, Turkey, Brazil

Elo 22" All-in-One

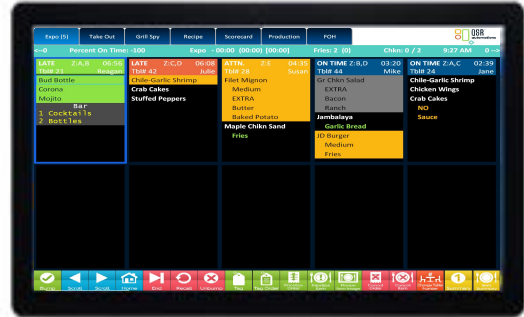


FEATURE	SPECIFICATION
Operating System	Android™ 10
Processor	Value Model: Rockchip OK3399
Memory	4GB
Storage	32GB SSD
Speakers	Two 2W stereo internal
I/O Ports	Ethernet 1x LAN Gigabit, 1x USB 3.0 Support (900mA), Type C USB output, Micro SD slot, GPIO
Wireless	802.11 a/b/g/n/ac + Bluetooth 5.0
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Number of Colors	8-bit (16.7 million)
Brightness	TouchPro PCAP: 215 nits, LCD Panel: 300 nits
Response Time	5 ms
Contrast Ratio	1000:1
Power	AC input voltage: 100-240 VAC; Input frequency: 50-60 Hz
Aspect Ratio	16:10
Dimensions (W x D x H)	20.66" x 12.79" x 1.17" (524.8mm x 324.8mm x 29.7mm)
Weight	9.5 lbs (4.3 kg)
Temperature	32°F to 104°F (0°C to 40°C)
Mounting Options	VESA 75mm
Peripheral Mounting	Not available
Warranty	2-year
Regulatory Approvals	UL/cUL (US); FCC (US); IC (Canada); CE (Europe); CB (International); VCCI, MIC (Japan); RCM (Australia)
Supported Countries	Canada, USA, Australia, Japan, New Zealand, Austria, Belgium, Czech Republic, Denmark, France, Germany, United Kingdom, Hungary, Italy, Netherlands, Poland, Portugal, Romania Spain, Sweden, Switzerland, Turkey, Brazil

Elo 15" Windows All-in-One

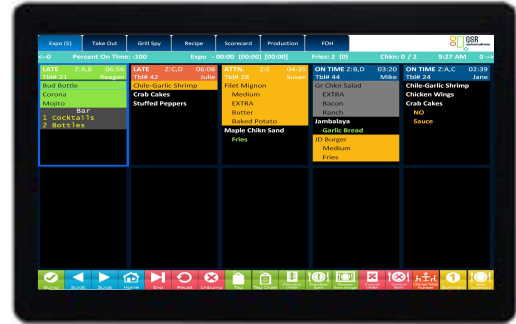

FEATURE	SPECIFICATION
Operating System	Windows 10 IoT
Processor	Intel® Celeron® J4125 Processor (4M Cache, up to 2.7 GHz)
Memory	Celeron: 4GB 2666MHz DDR4 SO-DIMM on 1 of 2 slots (Expandable to 8GB maximum on 2 slots)
Storage	128GB M.2 SATA SSD 72 TBW
I/O Ports	1 x LAN RJ45 (Gigabit), 1 x USB 3.0, 4 x Micro USB 2.0 on edges for optional Elo Edge Connect peripherals
Speakers	2 x 2W internal speakers
Wireless	Wi-Fi 802.11 a/b/g/n/ac 2.4GHz and 5GHz
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Brightness	LCD panel: 300 nits; TouchPro PCAP: 270 nits
Response Time	25 msec
Contrast Ratio	700:1
Power	External USB-C power supply brick, AC input voltage: 100-240 VAC, Input frequency: 50-60 Hz
Aspect Ratio	16:9
Dimensions (W x D x H)	15.13" x 9.7" x 1.72"
Weight	Packaged: 9.5 lbs / 4.3 kg Unpackaged: 4.9 lbs / 2.2 kg
Temperature	Operating: 0°C to 35°C / 32°F to 95°F; Storage: -20°C to 60°C / -4°F to 140°F
Mounting Options	75mm VESA mount
Warranty	3-year
Regulatory Approvals	UL/cUL, FCC, TUV, CE, CB, UKCA, Mexico NOM, C-Tick/RCM, VCCI, Argentina S-Mark, CCC

Elo 22" Windows All-in-One

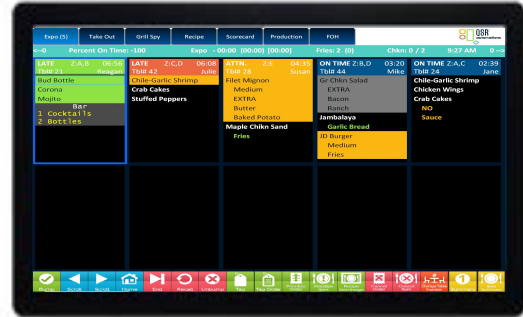

FEATURE	SPECIFICATION
Operating System	Windows 10 IoT
Processor	Intel® Celeron® J4125 Processor (4M Cache, up to 2.7 GHz)
Memory	Celeron: 4GB 2666MHz DDR4 SO-DIMM on 1 of 2 slots (Expandable to 8GB maximum on 2 slots)
Storage	128GB M.2 SATA SSD 72 TBW
Speakers	2 x 2W internal speakers
I/O Ports	1 x LAN RJ45 (Gigabit), 1 x USB 3.0, 4 x Micro USB 2.0 on edges for optional Elo Edge Connect peripherals
Wireless	Wi-Fi 802.11 a/b/g/n/ac 2.4GHz and 5GHz
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 Touch
Brightness	LCD panel: 250 nits; TouchPro PCAP: 225 nits
Response Time	14 msec
Contrast Ratio	1000:1
Power	External USB-C power supply brick, AC input voltage: 100-240 VAC, Input frequency: 50-60 Hz
Aspect Ratio	16:9
Dimensions (W x D x H)	20.7" x 12.57" x 2.07"
Weight	Packaged: 15.4 lbs / 7 kg Unpackaged: 11.5 lbs / 5.2 kg
Temperature	Operating: 0°C to 35°C / 32°F to 95°F; Storage: -20°C to 60°C / -4°F to 140°F
Mounting Options	75mm or 100mm VESA mount
Warranty	3-year
Regulatory Approvals	UL/cUL, FCC, TUV, CE, CB, UKCA, Mexico NOM, C-Tick/RCM, VCCI, Argentina S-Mark, CCC