



Kitchen Armor 15.6" All-in-One

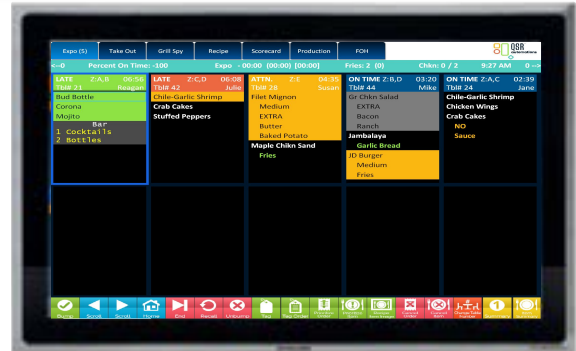

FEATURE	SPECIFICATION
Material	2 mm strengthen glass
Active Display Area	13.55" x 7.62" / 344.16 mm x 193.59 mm
Diagonal	15.6"
Aspect Ratio	16:9
Dimensions	15.44" x 9.63" x 1.63" / 392.18 mm x 244.60 mm x 41.40 mm
Weight	8.45 lbs / 3.83 kgs
Native Resolution	1920 x 1080 at 60Hz
Color Depth	262 K
Touch	Technology: PCAP Resolution: 4096 x 4096 # of Touches: 10-Touch Accuracy: 2mm Response Time: 10 msec
Input Method	Finger, Touch Pen, Gloved Hand
CPU	Rk3288
Memory	2G
Storage	8G
Operating system	Android 10
Networking	10/100 Ethernet LAN
Brightness (typical)	215 nits
Response (typical)	30 msec
Viewing Angle	Horizontal: 85 or 170 total; Vertical: 85 or 170 total
Contrast Ratio	800:1
Light Transmission	86%
Power Supply	POE+ / External 12V DC Power Adapter
Temperature	Operating: 0°C to 40°C (32°F to 104°F); Storage: -20°C to 60°C (-4°F to 140°F)
Humidity	Operating: 20% to 80%; Storage: 10% to 90%
Mounting Options	100 mm VESA mount
IP	IP 65
Certifications	CE, FCC
Warranty	3 year

Kitchen Armor 21.5" All-in-One

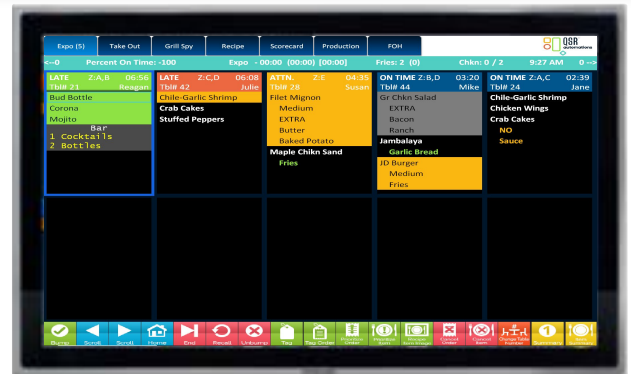

FEATURE	SPECIFICATION
Material	Stainless Steel, 3.0mm strengthen glass
Active Display Area	18.77" x 10.56" / 476.64mm x 268.11 mm
Diagonal	21.5"
Aspect Ratio	16:9
Dimensions	20.83" x 12.6" x 1.94" / 529mm x 320mm x 49.2mm
Weight	16.3 lbs / 7.39 kgs
Native Resolution	1920 x 1080 at 60Hz
Color Depth	16.7 million
Touch	Technology: PCAP Resolution: 4096 x 4096 # of Touches: 10-Touch Accuracy: 2mm Response Time: 10 msec
Input Method	Finger, Touch Pen, Gloved Hand
CPU	RK3399
Memory	4G
Storage	16G
Operating system	Android 10
Networking	10/100 Ethernet LAN
Brightness (typical)	250 nits
Response (typical)	10 msec
Viewing Angle	Horizontal: 89 or 178 total; Vertical: 89 or 178 total
Contrast Ratio	3000:1
Light Transmission	86%
Power Supply	POE+ / External 12V DC Power Adapter
Temperature	Operating: 0°C to 40°C (32°F to 104°F); Storage: -20°C to 60°C (-4°F to 140°F)
Humidity	Operating: 20% to 80%; Storage: 10% to 90%
Mounting Options	100 mm VESA mount
IP	IP 65 Front Side, IP67 Industrial RJ45 jack available (POE only)
Certifications	CE, FCC
Warranty	3 year