




Elo I-Series Steel

All-in-One Touchscreen for Android™



15" | 22"

Elo I-Series Steel 15" AiO Touchscreen

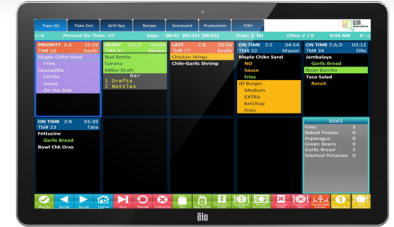

FEATURE	SPECIFICATION
Operating System	Android™ 12
Processor	Rockchip RK3399 Dual-core Cortex-A72 up to 1.8GHz + Quad-core Cortex-A53 up to 1.4GHz
Memory	4GB
Storage	32GB SSD
I/O Ports	Ethernet 1x LAN Gigabit, 1x USB 3.0 Support (900mA), 1x Type C USB output
Speakers	2x 1.5W
Wireless	802.11a/b/g/n/ac + Bluetooth 5.0
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 touch
Number of Colors	8-bit (16.7 million)
Brightness	TouchPro PCAP: 215 nits, LCD Panel: 250 nits
Response Time	25 ms
Contrast Ratio	700:1
Power	AC input voltage: 100-240 VAC; Input frequency: 50-60 Hz
Power Over Ethernet	MAX 25.5W (for PoE models)
Aspect Ratio	16:9
Dimensions (W x D x H)	15.08" x 9.11" x 1.22" / 383 mm x 231.5 mm x 30.9 mm
Weight	5 lbs / 2.27 kg
Temperature	32°F to 113°F / 0°C to 45°C
Mounting Options	VESA 75mm and 100mm
Peripheral Mounting	N/A
Warranty	2 years standard
Regulatory Approvals	UL/FCC (US); cUL/IC (Canada); CE WEEE/UKCA (Europe); CB (International); VCCI/MIC (Japan); RCM (Australia); CCC/RoHS/SRRC (China)

Elo I-Series Steel 22" AiO Touchscreen



FEATURE	SPECIFICATION
Operating System	Android™ 12
Processor	Rockchip RK3399 Dual-core Cortex-A72 up to 1.8GHz + Quad-core Cortex-A53 up to 1.4GHz
Memory	4GB
Storage	32GB SSD
I/O Ports	Ethernet 1x LAN Gigabit, 1x USB 3.0 Support (900mA), 1x Type C USB output
Speakers	2x 1.5W
Wireless	802.11a/b/g/n/ac + Bluetooth 5.0
Touch Technology	PCAP (TouchPro® Projected Capacitive) - 10 touch
Number of Colors	8-bit (16.7 million)
Brightness	TouchPro PCAP: 215 nits, LCD Panel: 250 nits
Response Time	14 ms
Contrast Ratio	1000:1
Power	AC input voltage: 100-240 VAC; Input frequency: 50-60 Hz
Power Over Ethernet	MAX 25.5W (for PoE models)
Aspect Ratio	16:9
Dimensions (W x D x H)	20.98" x 12.75" x 1.75" / 533 mm x 324 mm x 44.4 mm
Weight	13.07 lbs / 5.93 kg
Temperature	32°F to 113°F / 0°C to 45°C
Mounting Options	VESA 75mm and 100mm
Peripheral Mounting	N/A
Warranty	2 years standard
Regulatory Approvals	UL/FCC (US); cUL/IC (Canada); CE WEEE/UKCA (Europe); CB (International); VCCI/MIC (Japan); RCM (Australia); CCC/RoHS/SRRC (China)